


SECTION

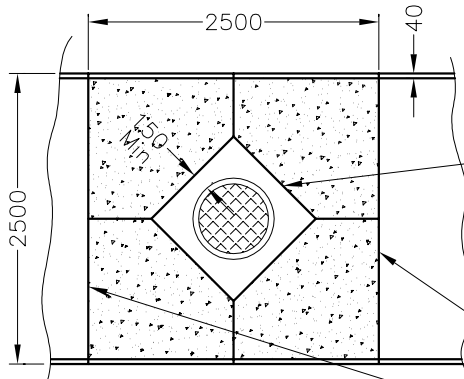

PLAN


BOXOUT AROUND ALL MANHOLES, VALVE COVERS, ETC... JOINTS AROUND BOXOUT ARE TO BE 13 X 100 EXPANSION JOINTS, ALL OTHER JOINTS ARE TO BE CONTRACTION JOINTS (See Detail A).

EXPANSION JOINT EVERY 12500 (Max.)

CONTRACTION JOINT EVERY 2500 (See Detail A).

GENERAL NOTES:

1. WALKWAY EDGES SHALL BE TOOLED WITH A 10 RADIUS EDGER.
2. CONSTRUCTION OF CONCRETE WALKWAYS TO CONFORM WITH THE DISTRICT OF LANGFORD SPECIFICATIONS.
3. CONCRETE TO BE 30 MPa AT 28 DAYS.
4. SLOPE CROSSFALL TOWARDS HIGHER GROUND IN GREENWAYS AND TOWARDS ROAD IN ROAD RIGHTS OF WAY.
5. EXPANSION JOINTS ARE TO BE ASPHALT IMPREGNATED FIBREBOARD OR OTHER APPROVED PREMOULDED FILLER.
6. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

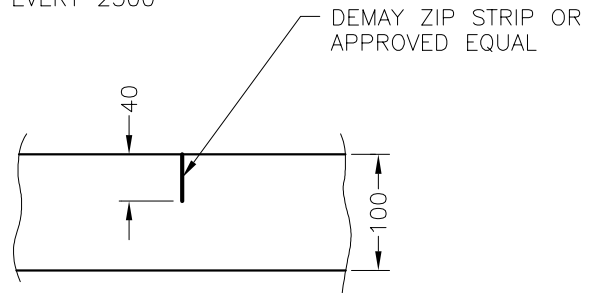

DETAIL A
(CONTRACTION JOINT)

CONCRETE WALKWAY CONSTRUCTION



**CITY OF LANGFORD
ENGINEERING DEPARTMENT**

DATE: 98/03/25

DRAWN: GRH

DWG No.

SCALE: N.T.S.

APPROVED:

R7